


Ultrafabrics Collections

Ultraleather
Ultraleather Pro
Brisa
Brisa Distressed
Promessa
Tottori

Ultraleather

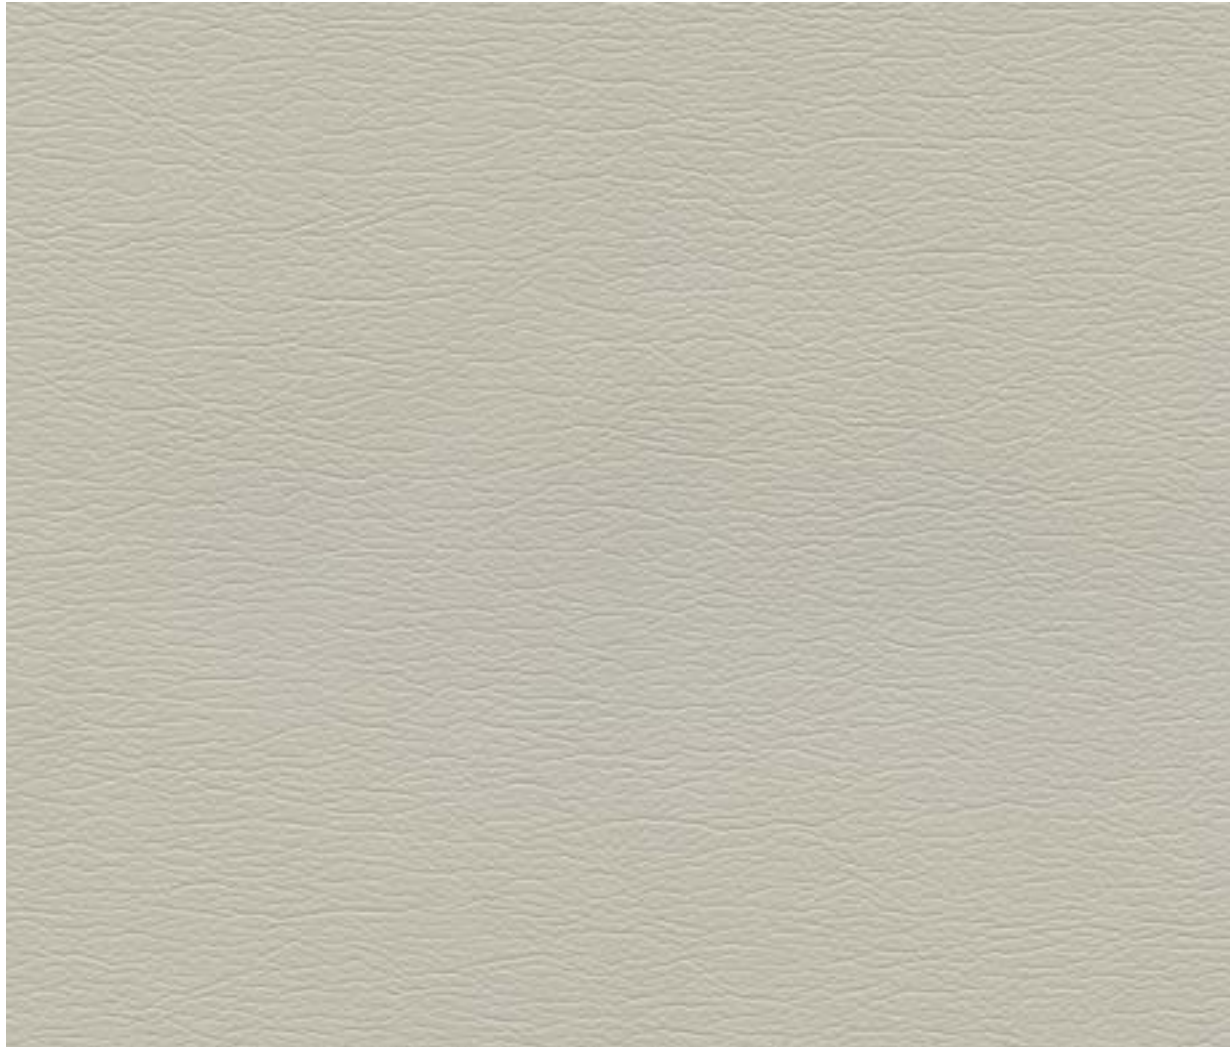


291-5684 Arctic



291-0001 White



291-5805 Ermine



291-5714 Ice



291-5668 Silver Pearl



291-5666 Dove Grey



291-5040 Elephant



291-5708 Granite



291-5763 Charcoal



291-5806 Schooner



291-5607 Raven Wing



291-3720 Light Oyster



291-3455 Milkweed



291-3599 Almond



291-3700 Ivory



291-5250 Sassy



291-3601 Doe



291-3609 Buff



291-3850 Sand



291-3719 Champagne



291-8243 Apricot




291-3729 Tan



291-3926 Cashmere



291-3851 Chamois



291-3778 Pecan



291-6588 Salmon




291-5676 Pelican



291-3183 Pine Cone



291-1256 Papyrus



291-8219 Adobe



291-8233 Autumn Leaf




291-3602 Stone



291-3523 Cave



291-3779 Taupe



291-3612 Curry



291-1347 Poppy




291-3777 Walnut



291-3666 Fudge



291-3205 Hot Chocolate



291-3610 Hide



291-1176 Red



291-7214 Boysenberry



291-9385 Plum



291-2552 Riviera



291-2527 Lagoon




291-5200 Citrus



291-1311 Brick




291-3469 Garnet



291-2685 Bayou



291-2553 Cyan



291-4460 Parrot



291-6580 Sorbet



291-2551 Baltic



291-2508 Rain Dance



291-2507 St. John




291-4454 Sonora



291-1334 Toro



291-2555 Nile



291-2509 Poseidon



291-4314 Herbal Mist



291-4430 Eucalyptus



291-1312 Chianti



291-2556 Admiral



291-2478 Diplomat Blue



291-4351 Shetland



291-4313 Sweetgrass



Ultraleather from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface

100% Reinforced Rayon Backing

Weight:

Approx. 9.7 oz. Per Square Yard

Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

Ultraleather Pro



554-3894 Hazelwood



554-0008 White Wash



554-3412 Salt



554-6547 Dawn Grey



554-5648 Cloud



554-3353 Tundra



554-3352 Shore




554-6566 Moon Glow



554-5733 Mortar



554-5626 Char



554-5618 Dark Knight



554-3376 Dark Chocolate



554-3811 Swan



554-8251 Melon



554-5649 Ember



554-2661 Blue Bird



554-4315 Agave



554-3803 Parfait



554-8254 Rosy Coral



554-3087 Woodcres



554-2522 Capri




554-4530 Coastal



554-3595 Cork



554-8229 Campfire



554-7200 Blush



554-2530 Sky



554-4333 Arugula




554-3444 Toasted Bagel



554-1329 Rhubarb




554-9441 Mauve



554-2711 Blueberry



554-4424 Chino




554-3835 Raw Sienna



554-1357 Cranberry



554-9451 Azalea



554-2547 Sailor



554-4443 Laurel



554-3209 Cougar



554-3214 Chestnut



554-9336 Aubergine



554-2616 Oxford Blue



554-4534 Sherwood



Antimicrobial



Ink & Stain Resistant

Ultraleather Pro from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface

100% Reinforced Rayon Backing

Weight:

Approx. 9.7 oz. Per Square Yard

Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

Ultraleather Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim*
- Red Wine

* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

Brisa



533-3276 Wishbone




533-5747 White



533-3234 Cookie Dough



533-3019 Birch



533-3866 French Vanilla



533-3823 Aztec



533-3277 Moon



533-3915 Putty



533-3822 Bone



533-3863 Cream



533-8202 Koi




533-5820 Quicksilver




533-3914 Bark



533-3864 Desert Clay




533-3867 Golden



533-8245 Cinnabar




533-5802 Ash



533-3275 Gravel



533-3946 New Sand



533-3051 Ginger



533-1383 Pompeian Red




533-5703 Wrought Iron




533-3022 Shiitake



533-3200 Peat




533-3591 Caramel




533-1373 Salsa




533-5749 Black Onyx



533-3023 Coffee Bean



533-3913 Truffle



533-3825 Canyon



533-1361 Beet Root



533-8203 Flamingo



533-2645 Cambridge Blue



533-3272 Iceberg



533-2698 Sterling Blue



303-4510 Celery



533-1359 Strawberry



533-2620 Evening Blue



533-2523 Turq



533-2697 Mineral



533-4448 Apple Green




533-1344 Rose Red



533-2694 Night Navy



533-2696 Skyway




533-4303 Seaweed




533-4487 Sage




533-9374 Blossom



533-2683 Indigo



533-2621 Blue Sea



533-4302 Esmeralda




533-4488 Olive



533-9400 Cabernet



533-9378 Abyss



Brisa from Ultrafabrics

Applications

Interior Upholstery, Vertical Surfaces

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard
Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements


- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

Brisa Distressed

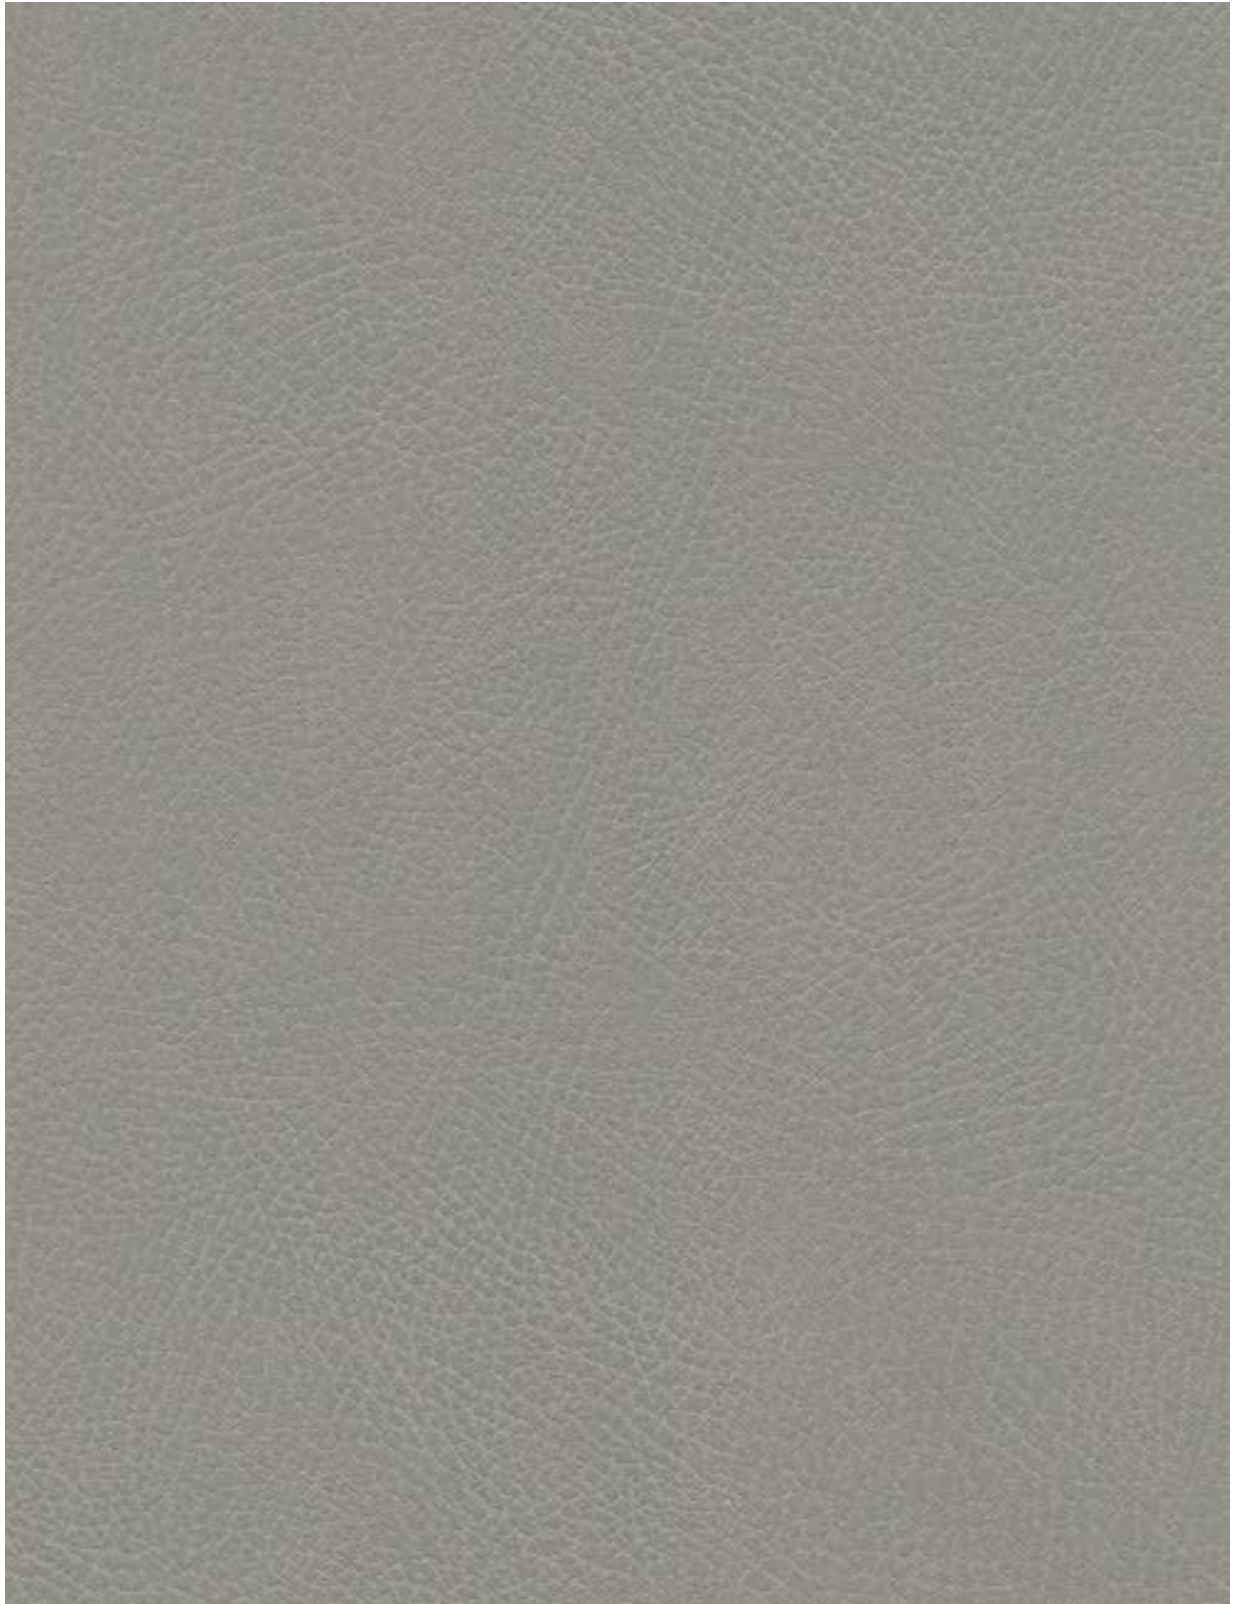


535-3273 Shield



535-3274 Coyote



535-3021 Manila



535-3480 Navajo Ivory



535-3134 Buckskin



535-3340 Desert Tan



535-3271 Koala



535-3273 Shield



535-3024 Chamois



535-3980 Waylan



535-3869 Muslin



535-5679 Iron




535-3871 Moccasin



535-3137 Saddle




535-3972 Lasso



535-4512 Prairie




535-3232 Railroad




535-3231 French Roast



535-3201 Bison



535-3976 Bridle





535-3870 Pelt



535-5773 Stormy



535-3974 Steerhide



Brisa Distressed from Ultrafabrics

Applications

Interior Upholstery, Vertical Surfaces

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard
Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

8"V x 10.5"H / 203mm V x 267mm H

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Only in North America

Promessa



363-3464 Tusk



363-5715 Snow




363-3152 Parchment



363-3463 Cocoa




363-3462 Woodpecker



363-3391 Sparrow



363-5818 Ash




363-5817 Shale



363-5011 Battleship



363-5845 Ebony




363-3037 Horsehair



363-3036 Linen



363-5263 Mustard



363-2695 Aquamarine




363-4515 Shetland




363-3189 Barley



363-5258 Sun Shower



363-2604 Stone Blue



363-7309 Malibu



363-3148 Briarwood




363-3142 Camel



363-2680 Atlantic



363-4481 Scallion




363-3141 Fields




363-3145 Bronze



363-2672 Corn Flour




363-7273 Aspen Green




363-3195 Mesquite




363-1396 Blood Orange



363-9387 Moroccan Fig



363-9414 Merlot



363-1387 Dogwood



363-9371 Beet



Antimicrobial

Promessa from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 11.5 oz. Per Square Yard
Approx. 390 Grams Per Square Metre

Thickness:

Approx. 1.1 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements


- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

Tottori

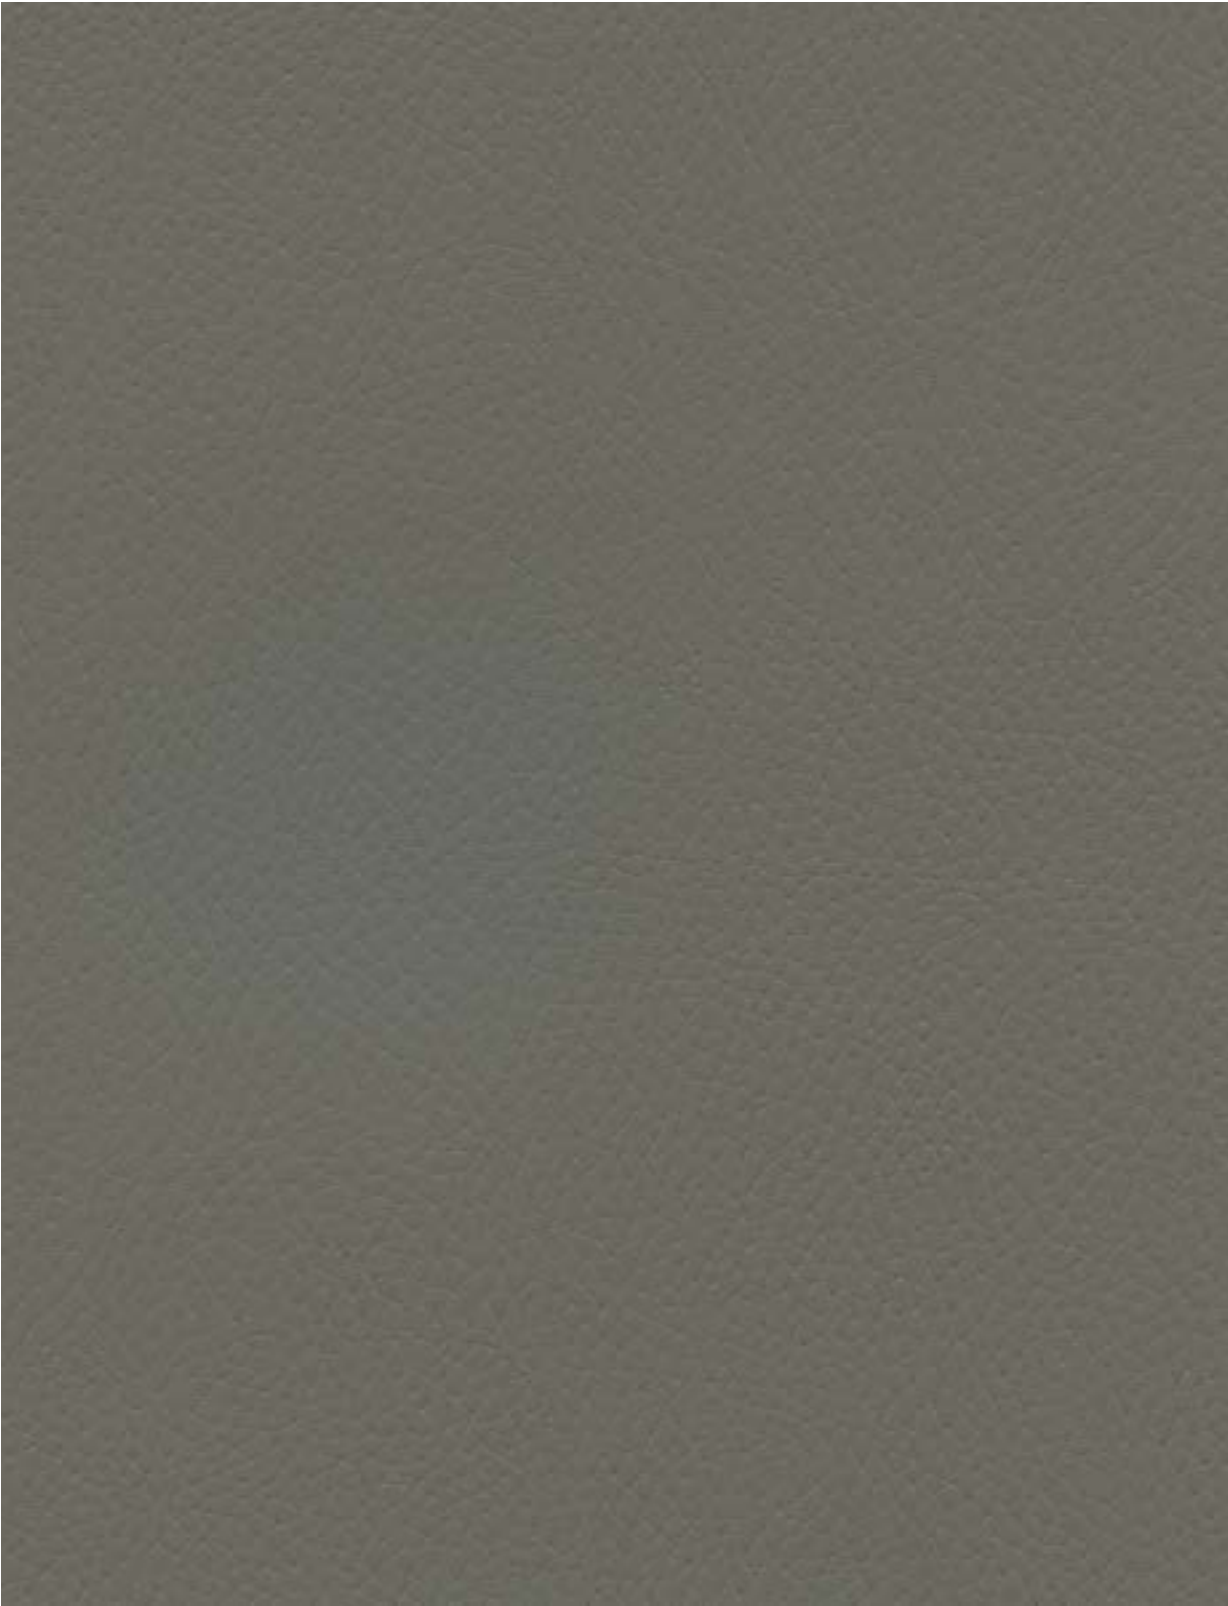

601-5033 Sand Castle



601-3418 Origami White



601-3120 Udon



601-5998 Rice Paper



601-4312 Lichen




601-2622 Blue Mirage




601-5033 Sand Castle



601-3280 Tatami Mat



601-3348 Ginseng




601-9362 Orchid



601-2595 Hot Spring




601-5037 Classic Grey



601-3386 Desert Dune




601-3300 Terrain




601-1404 Rouge




601-2515 Shibori Blue



601-5020 Black Sesame



601-3400 Soba



601-3297 Soy Sauce



Tottori from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 12.4 oz. Per Square Yard
Approx. 420 Grams Per Square Metre

Thickness:

Approx. 1.1 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.